

ORDER INFORMATION

BH102-XXX-XX

PLATING

T1=TIN PLATING

F1=FULL GOLD FLASH

F2=5u" FULL GOLD

F3=10u" FULL GOLD

S1=SELECTIVE FLASH PLATING

S2=SELECTIVE 5u" PLATING

S3=SELECTIVE 10u" PLATING

NO. OF POSITIONS

6~100

TOOLING SERIES

NOTES:

1.CURRENT RATING:1AMP

2.INSULATOR RESISTANCE:5000 MEGAOHMS MIN.

3.DIELECTRIC WITHSTANDING: AC 500V.


4.OPERATING TEMPERATURE:-40°C~+105°C.

5.MATERIAL:

HOUSING:THERMOPLASTIC UL94V-0,BLACK.

TERMINAL:COPPER ALLOY.

6.RoHS COMPLIANT.

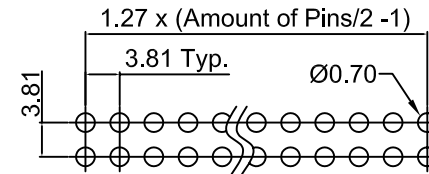

Recommended P.C.B. Layout  
Layout Tolerance = ± 0.05 mm

| TOLERANCE |        |
|-----------|--------|
| LINEAR    | ANGLES |
| X.±       | X'±    |
| .X±0.25   | .X'±   |
| .XX±0.15  | .XX'±  |
| .XXX±0.05 | .XXX'± |



TITLE: 1.27mm Pitch PH+Box Header  
Daul Row DIP Type

PART NO. BH102-XXX-XX

DWG NO.

|     |         |       |          |
|-----|---------|-------|----------|
| [A] | ISSUED  | Bolin | 11/15/06 |
| REV | ECN NO. | NAME  | DATE     |

APPD:

MAT'L:

CHKD:

FINISH:

DRWN:

Q'TY:



UNITS

SCALE

SHEET

REV

MM

NONE

1 OF 1

A