



REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		ISSUED	FOX	10/25/10'

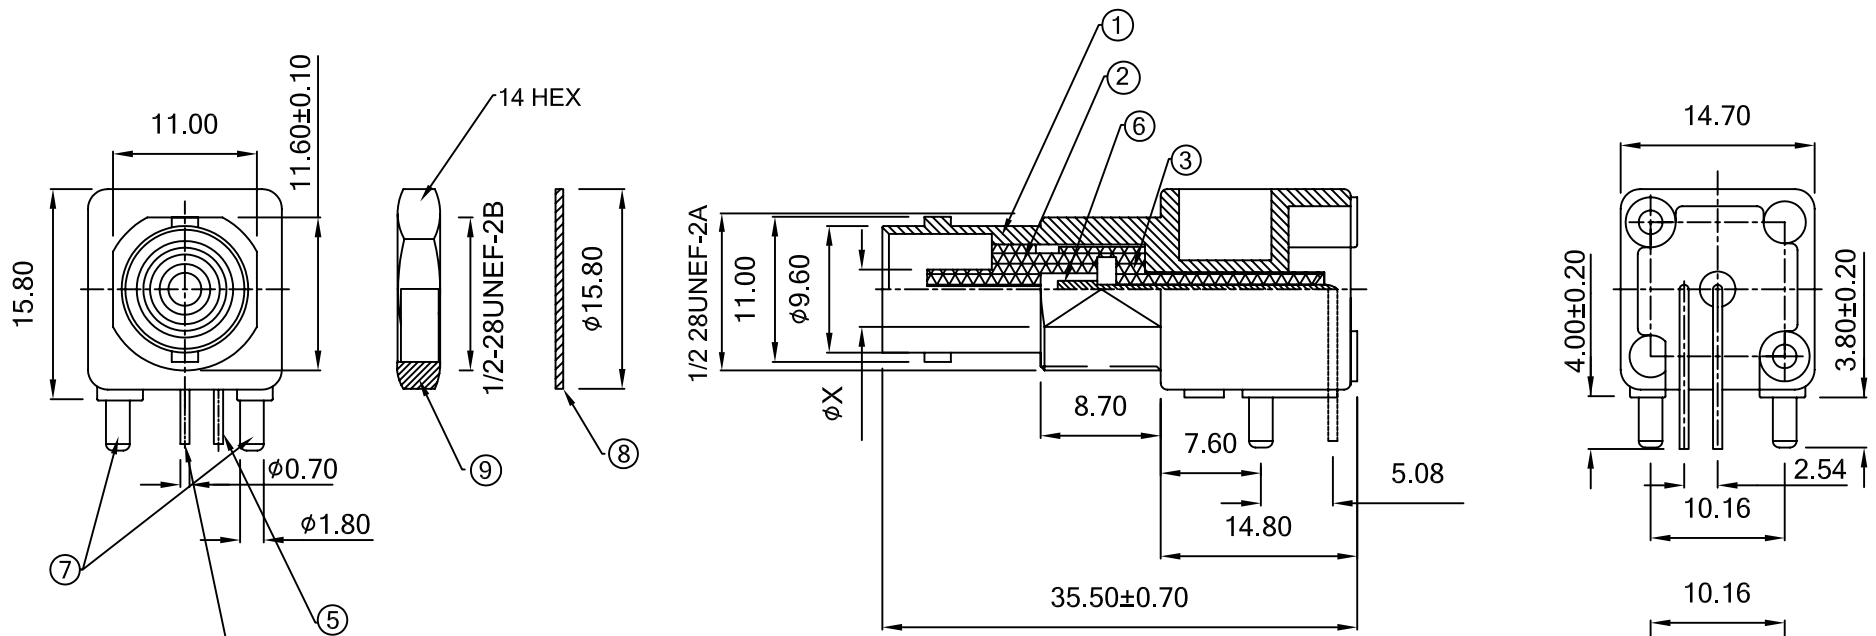

ORDERING INFORMATION
 BNC-75-155FR-X
 PIN DIAMETER
 A = φ4.60 / 50 Ohm
 B = φ3.00 / 75 Ohm

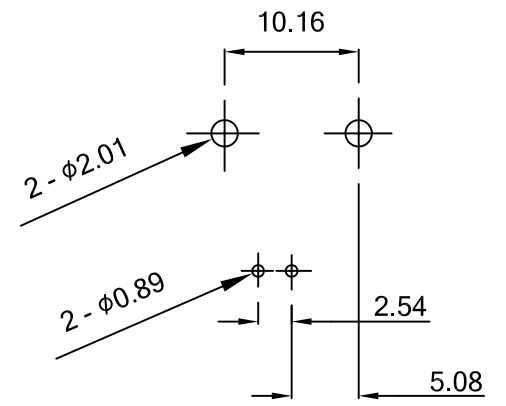

RECOMMENDED P.C.B. LAYOUT
 TOLERANCE = ±0.05mm

9	NUT	1	BRASS	NICKEL PLATED
8	WASHER	1	IRON	NICKEL PLATED
7	FIXTURE	2	BRASS	TIN PLATED
6	CONTACT PIN	1	PHOSPHOR BRONZE	GOLD PLATED
5	CONTACT WIRE	1	BRASS	TIN PLATED
4	CONTACT WIRE	1	BRASS	TIN PLATED
3	INSULATOR	1	PP	
2	INSULATOR	1	POM	
1	BODY	1	ZINC	NICKEL PLATED
ITEM	NAME	Q'TY	MATERIAL	FINISH

GENERAL TOLERANCE		ANGLE TOLERANCE		DRAWN	DATE	
0.5°-15° = ±0.15		X° ± 5°		FOX	10/25/10'	
15°-30° = ±0.30		.X° ±		DESIGN	DATE	TITLE
30°-120° = ±0.60		.XX° ±				BNC Female Right Angle PC Board Mount
>120° = ±1.00		.XXX° ±				PART NUMBER
MATL		SEE BOM		CHECKED	DATE	BNC-75-155FR-X
FINISH		SEE NOTES		APPROVED	DATE	DRAWING NO.
SCALE		N/A				GT110-30132
SHEET		1 OF 1				SIZE
						REV.
						A

RoHS Compliant