


**NOTES:**

1. CABLE: 22AWG(7/0.25)TIN, STRANDED TOPCOATED. 7 CONDUCTORS.
2. THE CABLE SHALL HAVE A MINIMUM OF 0.178mm THICKNESS INSULATION AT ANY POINT.
3. UL STYLE: UL 2651, JACKET: PVC GRAY.
4. VOLTAGE RATING: 300V MAX.
5. FLAMMABILITY: VW-1.
6. TEMPERATURE RATING: -20°C TO +105°C.
7. RoHS COMPLIANT.
8. Specify Length as Suffix on Part Number in mm.  
For Example:  
JPRXX-10563-127 = 127mm Long Ribbon Cable.

**ORDER INFORMATION**

JPR XX- 10563- X

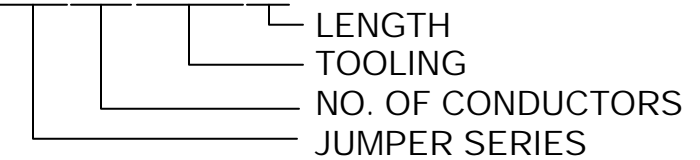

A  
B  
C  
D  
E

A  
B  
C  
D  
E

1 2 3 4 5 6 7 8

TOLERANCE	
LINEAR	ANGLES
X. ±	X° ±
.X ± 0.25	.X° ±
.XX ± 0.15	.XX° ±
.XXX ± 0.05	.XXX° ±



TITLE:  
RIBBON CABLE PITCH 3.96mm ( 0.156")

PART NO. JPRXX-10563-X

DWG NO. SC-10563

[A]	ISSUED	AXL	1/3/07'
REV	ECN NO.	NAME	DATE

APPD:	MAT'L:
CHKD:	FINISH:
DRWN: AXL	Q'TY:

	UNITS	SCALE	SHEET	REV
	MM	NONE	1 OF 1	A