


P.C.B LAYOUT/TOP VIEW

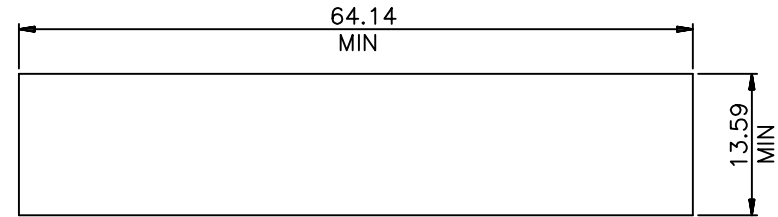

RECOMMENDED PANEL CUTOUT

RoHs Compliant

TOLERANCE	
LINEAR	ANGLES
X. ±	X° ±
.X ± 0.40	.X° ±
.XX ± 0.30	.XX° ±
.XXX ± 0.20	.XXX° ±



TITLE:	RJ 45 8Px8C 4 Ports Jack			
PART NO.	RJ45-T04A010P7			
DWG NO.	GTI08-30165			
	UNITS	SCALE	SHEET	REV
	MM	NONE	1 OF 2	A

[A]	ISSUED	SWL	6/19/07'
REV	ECN NO.	NAME	DATE

Ordering Information:

RJ 45-T XX AXX 0 S7

Plating: (Selective plating for stamping contacts)

S1 = Gold Flash

S2 = 5u"

S3 = 10u"

S4 = 15u"

S5 = 30u"

S6 = 50u"

S7 = Special Plating Request by Customer

Led Configuration:

See LED Chart

Tooling Family

Number of Ports

Mounting Type:

V = Vertical

T = R/A tab up

D = R/A tab down

U = Multiple ports Stacked two rows

C = Combo type

RJ45 Series:

For Other Feature on this Parts please contact Manufacture for detail and part number.

MATERIALS:

PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC FLAMMABILITY RATING UL 94V-0.

CONTACTS: PHOSPHOR BRONZE

PLATING: 6u" GOLD PLATING OVER NICKEL IN CONTACT,
TIN PLATING OVER NICKEL IN SOLDER AREA.

SHIELD: BRASS PLATING NICKEL ALLOY.

LED CHART

	Left LED		Right LED	
	-L3/+L4	+L3/-L4	-L1/+L2	+L1/-L2
0	w/o	w/o	w/o	w/o
1	Green		Yellow	
2		Green		Yellow
3	Green		Green	Yellow
4	Yellow		Green	
5		Green	Yellow	Green
6	Green	Orange	Yellow	
7	Yellow		Green	Orange
8	Yellow		Orange	Green
9	Green	Orange	Green	
B		Yellow		Green
C	Green		Green	
D	Green	Yellow	Green	Yellow

PART NO.	RJ45-T04A010P7	SHEET	REVISION
DWG NO.	GTI08-30165	2 OF 2	SEE SHEET 1