

NOTES:


- HOUSING-DSM STANYL TE250F6 (NYLON-46)  
HEAT DEFLECTION TEMP.290°  
BLACK COLOR, UL94V-0
  - CONTACTS-0.35mm THICK PHOS-BRONZE PLATED  
WITH HARD GOLD AND GOLD FLASH IN  
SOLDER AREA.
  - SHIELD-0.25mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

ORDER INFORMATION


RJ4R-2U 08-C K 1 3 T 1Q

① ② ③ ④ ⑤ ⑥ ⑦

- CONNECTOR:  
RJ4R: RJ45 R/A CONNECTOR
- TYPE:  
2U: FEMALE, DIP TYPE
- POSITIONS  
08: 8 POSTIONS
- INSULATOR MATERIAL  
C: NYLON 46
- INSULATOR COLOR  
K: BLACK
- CONTACT PLATING  
1: PLATED WITH HARD GOLD AND  
GOLD FLASH IN SOLDER AREA
- SHIELD PLATING  
3: NICKEL PLATING

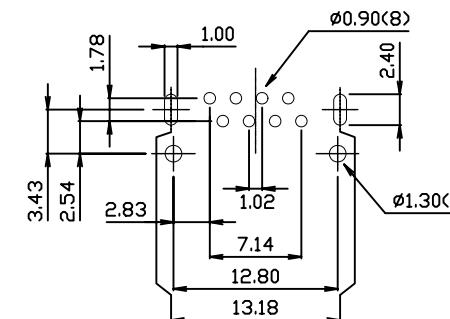

PCB LAYOUT  
Ref.

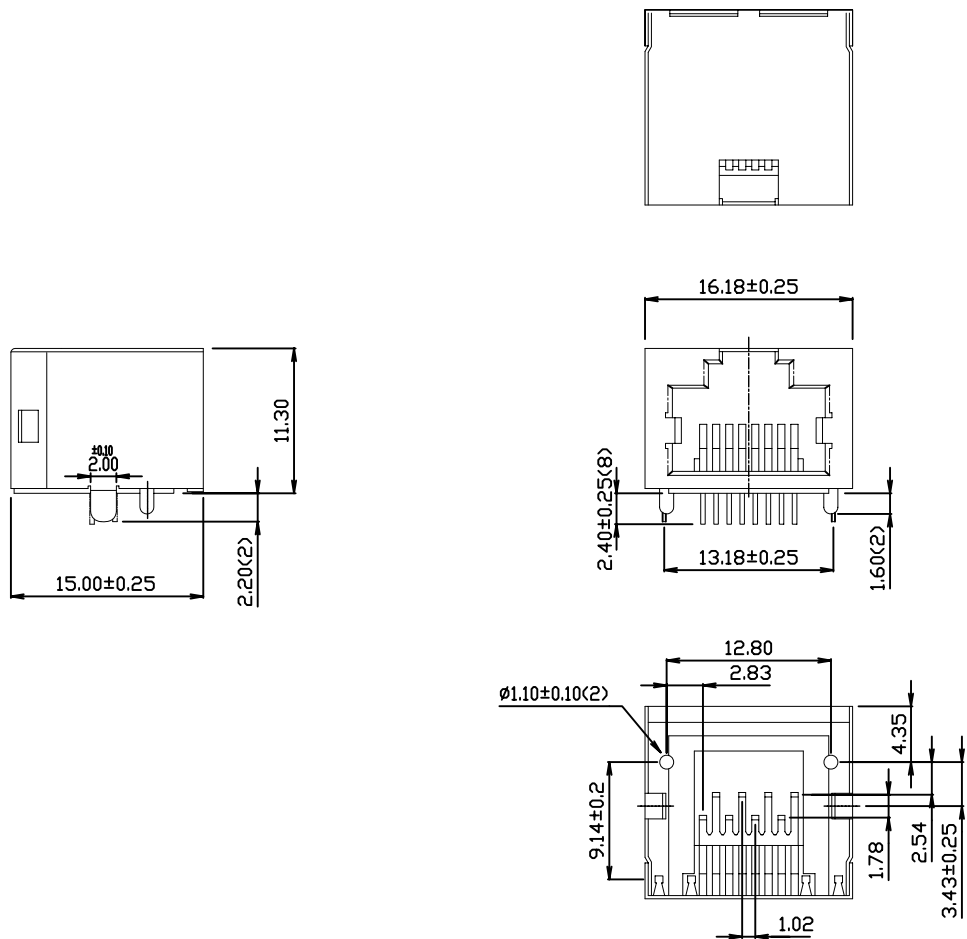

RoHS Compliant

TOLERANCE	
LINEAR	ANGLES
X. ± 0.38	X° ± 0°30°
.X ± 0.25	.X° ± 0°30°
.XX ± 0.13	.XX° ± 0°30°
.XXX ± 0.05	.XXX° ± 0°30°

**GENESIS**  
TECHNOLOGY, INC  
A Genesis Electro-Mechanical Company

7F, No. 191, Sec. 2  
Chung-Yang Rd.,  
Tu-Cheng City  
Taipei Hsien, Taiwan

TITLE:	RJ45 RECEPTACLE CONNECTOR			
PART NO.	RJ4R-2U08-CK13T1Q			
DWG NO.	GTI09-25091			

[A]	ISSUED	Vegas	07/28/09	.XX ± 0.13	.XX° ± 0°30°	APPD:	MAT'L:	UNITS	SCALE	SHEET	REV
	REV.	ECN NO.	NAME	DATE	.XXX ± 0.05	.XXX° ± 0°30°	CHKD:				
						DRWN: Kathy-Tan	Q'TY:	MM	NONE	1 OF 1	A