


SDC224-X
 CENTER PIN
 A: 2.0
 B: 2.45

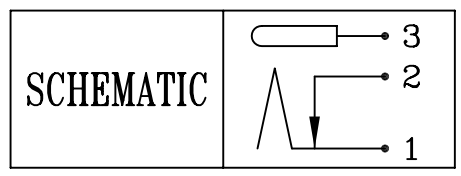

Recommended PAD Layout
 [TOP VIEW]

ITEM	NAME	MATERIAL	FINISH	Q'TY	NOTE
6	CENTER PIN	Cu	Ni	1	ø2.0/ø2.5
5	RIVET CONTACT	BRASS	Ag	1	40T
4	SHUNT	BRASS	Ag	1	40T
3	SPRING CONTACT	PBS	Ag	1	30T
2	BACK COVER	POLYAMIDE	30	1	UL94V-0
1	HOUSING	POLYAMIDE	30	1	UL94V-0

[B]

REV	ECN NO.	NAME	DATE	TOLERANCE		APPD:	MAT'L:	DRWN: AXL	Q'TY:	TITLE:	PART NO. SDC224-X			
				LINEAR	ANGLES						SC-10190			
				X.±	X'±						UNITS	SCALE	SHEET	REV
[B]	Remove Peg Option and Correct Tolerance	AXL	4/20/09'	.X±0.30	.X'±						MM	NONE	1 OF 1	B
[A]	ISSUED	AXL	11/22/05'	.XX±0.20	.XX'±									
				.XXX±	.XXX'±									



TITLE:		PART NO.		DWG NO.		SCALE		SHEET		REV	
ø2.0/ø2.5mm DC POWER JACK WITH PEG		SDC224-X		SC-10190		NONE		1 OF 1		B	